

FEATURES

- Maximum data throughput 49Gb/s
- 16 TS processors on the main board, 100Mb/s bandwidth for each TS processor
- 2 SFP GbE IP ports with maximum 920Mb/s input and output data rate
- Up to 256 MPTS/SPTS TS/IP input and 512 MPTS/SPTS output without IP-FEC
- Up to 24 MPTS/SPTS TS/IP input and 24 MPTS/SPTS output with IP-FEC
- PSI/SI edition and re-generation, PID re-mapping and filtering
- Control and monitoring by Front Panel, Menu, Web and SNMP
- Total 6 slots for different digital TV functional modules: modulator, demodulator, encoder,transcoder, decoder, interface adapter, etc
- Removable cooling fan assembly with alarm & speed control
- Dual hot-swappable power supplies units
- 1RU rack with display screen, 6 buttons, RS-232, USB


DCP-3000

Digital TV Content Processing Platform

The DCP-3000 provides a flexible platform to perform many functions including video encoding/transcoding and remultiplexing using legacy ASI interfaces and modern LAN based TS-over-IP (TS/IP).

The **DCP-3000 Digital Content Processing Platform** from IDC brings a compact, powerful and flexible solution that allows operators to build or update DTV or IPTV headends to meet the requirements of modern network architectures. **DCP-3000** is a compact 1U platform capable of processing a high number of streams. By

inserting up to 6 optional function modules and pluggable reMUX/ Scrambler extended modules, **DCP-3000** integrates all DTV headend functions, such as DVB satellite signal reception, descrambling, encoding, transcoding, remultiplexing, scrambling and modulation in one single compact unit.

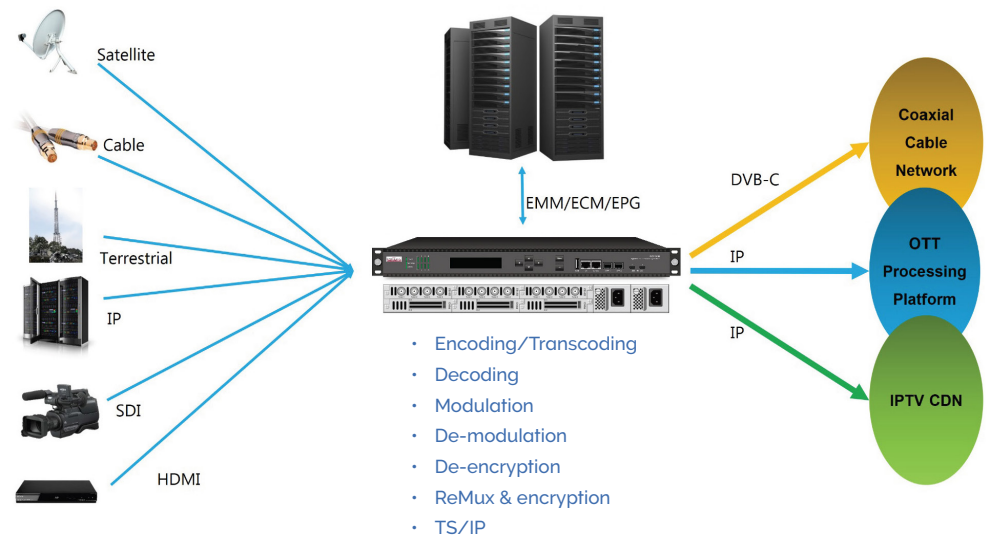

Front Panel




DCP-3000MF


DATA EXCHANGE	
Standard	IEEE 802.3, 1000 Base-T, Full Duplex
Max. Effective Bit Rate	920Mb/s
Data Protocol	UDP or RTP, SPTS or MPTS
Control Protocol	ICMP, ARP, IGMP v2/v3
FRONT PANEL	
TS/IP Connector Type	2 x SFP, 1000 Base-T, simultaneous forwarding of multiple TS/IP selected according to ISI etc.
CA Connector Type	1 x RJ-45, 10/100/1000 Base-T
Control Connector Type	1 x RJ-45, 10/100/1000 Base-T, Local configuration using Web GUI including alarms
Upgrade Connector Type	1 x USB
Debug Connector Type	2 x Mini USB
Display	2 x 20 characters LCD Display

REAR PANEL	
Module Slot	6 x Slots
OTHERS	
Power Supply	AC 100 - 250V 100W & 300W
Operating Temperature	0 ~ 45° C
Storage Temperature	-10 ~ 60° C
Operation Humidity	10 ~ 90%, (Non-condensed)

FUNCTION	MODEL	DESCRIPTION
Demodulation/De-scrambling Modules	D01S2	4-Way DVB-S/S2 Demodulating Module
	D02S2	4-Way DVB-S/S2 Demodulating Module, support ISI
	D01T2	4-Way DVB-T2/T/C Demodulating Module, support T2-MI
	P01CI	4-Way CI Module
Encoding/Transcoding Modules	P01EC	4-Way H.264/MPEG-2 Encoding/Transcoding Module, HDMI input
	P02EC	4-Way H.264/MPEG-2 Encoding/Transcoding Module, SDI input
	P01AT	4-Way HD/SD H.265 to H.264/MPEG-2 Transcoding Module
Decoding Modules	D01PA	2-Way HD/SD decoding module, HDMI and CVBS output
	D02PA	2-Way HD/SD decoding module, SDI and CVBS output, Genlock input
Multiplexing/Scrambling Module	P01MS	Re-multiplexing & Scrambling Module, 32 independent TS reMUX's and Scramblers
Modulation Modules	C01MOD	8-Way QAM/2-Way COFDM Modulation Module
	C02MOD	4-Way Un-adjacent Frequencies QAM/ATSC/COFDM/DTMB Modulation Module
Interface Module	C01ASI	5 x ASI In/Out Module
	C01IP	4 x SFP, 1000 Base-T
	P01DA	2 x DS3 Input/2 x DS3 Output/1 x ASI Adaptor Module

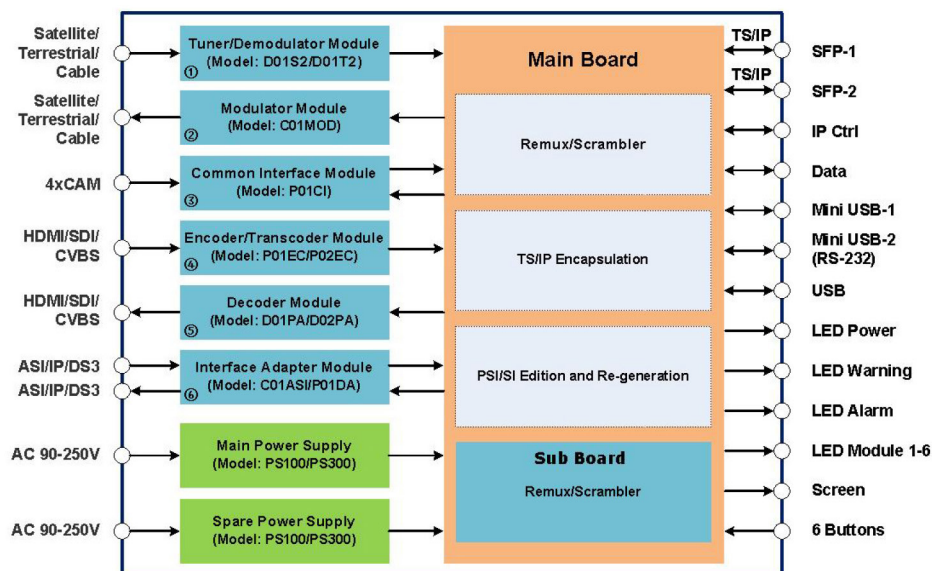

P01MS reMUX & Scrambler Extension Module	
Standard	Compliant with ISO13818 & EN300 468
Total Data Processing	15Gb/s data processing capability
Re-Multiplexing & Scrambling Function	32 independent TS reMUX's and Scramblers
PID	PID filtering, remapping, pass through & mapping
PSI/SI	Insert & Edit PSI/SI tables
PCR	PCR re-stamp & calibrate
Scrambling	Local or remote CAS synchronous simul-crypt processing
Temperature Control	Self-temperature monitoring

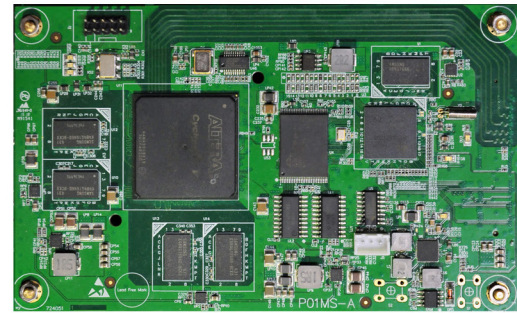


D01S2 / D02S2 4 x DVB-S/S2 Demodulator Module	
Connector Type	4 x F type female, 75Ω
Input Frequency Range	950 - 2150 MHz
Input Level	-65dBm ~ -25dBm
Symbol Rate	2-45MBaud(DVB-S QPSK), 2-31MBaud (DVB-S2 8PSK)
Roll Off Factor	0.35(DVB-S QPSK), 0.35/0.25/0.2(DVB-S2 8PSK)
FEC Puncture Rate	2/3, 3/4, 5/6, 6/7, 7/8(DVB-S QPSK); 2/3, 3/4, 3/5, 5/6, 8/9, 9/10(DVB-S2 8PSK)
LNB Polarity Selection Voltage	0, 13V, 18V selectable
LNB Band Selection Tone	0/22kHz selectable




DiSEqC	DiSEqC 1.0
BISS-1/E Decrypt	Each tuner supports 40 PIDs maximum
ISI	D02S2 Support
ISI ID	1-255
T2-MI de-encapsulator	Support

D03S2 4 x DVB-S/S2/S2X Demodulator Module	
Standards	ETSI EN 302-307-1 V1.4.1 (Part 1: DVB-S2 and Part 2: DVB-S2X)
Connector Type	4 x F type female, 75Ω
Symbol Rates	QPSK: 1 - 60 MBaud 8PSK: 1 - 60 MBaud 16APSK: 1 - 58 MBaud 32APSK: 1 - 55 MBaud 64APSK: 1 - 34 MBaud
FEC Code Rates	1/2, 2/3, 3/4, 5/6, 6/7, 7/8 (DVB-S QPSK) 2/3, 3/4, 3/5, 5/6, 8/9, 9/10 (DVB-S2 8PSK) 64800 bits FECFRAME VCM and ACM (DVB-S2X)
Roll Off Factor	0.35 (DVB-S QPSK) 0.35/0.25/0.2 (DVB-S2 8PSK) 0.35/0.25/0.2/0.15/0.1/0.05 (DVB-S2X)
Input RF Frequency	950 - 2150MHz
Input RF Level	-65 ~ -25dBm
LNB Voltage	0, 13, 18V
LNB 22kHz Tone	0, 22kHz




DiSEqC	DiSEqC 1.0
T2-MI de-encapsulation	8 PLP IDs demodulation per tuner input
BISS	BISS-1/E (up to 40 PIDs de-encryption per tuner input)
PLS	Gold Code
ISI	User configurable: 1 - 255

D01T2 4 x DVB-C/T/T2 Demodulator Module	
Connector Type	4 x F Type Female, 75Ω
Input Frequency Range	48 ~ 860 MHz(DVB-C) 104 ~ 862 MHz(DVB-T/T2)
Input Level	-15~ 15dBm (DVB-C) -70 ~ -20dBm (QEF, DVB-T/T2)
Symbol Rate	1 ~ 7MBaudITU J.83 Annex A DVB-C
Standard	0.35(DVB-S QPSK), 0.35/0.25/0.2(DVB-S2 8PSK)
Constellation	2/3, 3/4, 5/6, 6/7, 7/8(DVB-S QPSK); 2/3, 3/4, 3/5, 5/6, 8/9, 9/10(DVB-S2 8PSK)
Bandwidth	0, 13V, 18V selectable
FFT Mode	0/22kHz selectable




Guard Interval	1/4, 1/8, 1/16, 1/32(DVB-T) 1/4, 5/32, 1/8, 5/64, 1/16, 1/32, 1/64, 1/128(DVB-T2)
FEC Code Rate	1/2, 2/3, 3/4, 5/6, 7/8(DVB-T) 1/2, 3/5, 2/3, 3/4, 4/5, 5/6(DVB-T2)
Input Return Loss	7dB


P01DA 2 x DS3 Input/2 x DS3 Output/1 x ASI Adaptor Module	
Connector Type	5 x BNC Female, 75Ω
Standard	DVB-ASI, EN50083-9 / ITU-T G.703
Frame Structure	ITU-T G.752 / ITU-T G.804
ASI Input or Output	Switch by Web Control
DS3 bit rate	44.736Mb/s



P01CI 4 x CI De-encryption Module	
Connector Type	4 x Independent Common Interface (DVB-CI) slots
CI Decrypt	Multiple programs CAS or BISS-1/E Deencryption
CAM watchdog	Support




C01MOD 8-carrier QAM or 2-carrier COFDM Modulator Module	
Connector Type	2 x F type Female, 75Ω (1 x main output1 x -20dB monitor output)
Modulation	Support QAM or COFDM Modulation (Can't simultaneous working)
Standard of System	ITU-T J.83 Annex A, C
RF Output	2 groups of 4 adjacent channel carriers QAM RF output 2 un-adjacent channel carriers COFDM RF output
Constellation	16QAM, 32QAM, 64QAM, 128QAM, 256QAM (QAM)
Modulation Mode	16/32/64/128/256QAM(QAM) QPSK/16/64QAM(COFDM)
FFT Mode	2K/8K




RF output range	48 ~ 996MHz, step by 1kHz
Symbol rate	2.5 ~ 6.99MBaud
RF total output level	94 ~ 120dBuV
MER	> 38dB
Spurious rejection	> 55dB
Output return loss	-10dB

C02MOD 4-carrier Un-Adjacent Frequencies QAM/ATSC/COFDM/DTMB Modulator Module	
Connector Type	2x F type Female, 75Ω 1 x main output1 x -20dB monitor output
Modulation	Support ATSC/QAM(Annex A/B)/COFDM/DTMB Modulation Can't simultaneous working
Standard of System	ITU-T J.83 Annex A, B
RF Output Range	48 ~ 996MHz, step by 1kHz
Constellation	16QAM32QAM64QAM128QAM 256QAMQAM Annex A 64QAM256QAMQAM Annex B 8VSBATSC QPSK, 16QAM, 64QAMCOFDM QPSK16QAM32QAM64QAMQAM4_ NRDTMB
Modulation Mode	16/32/64/128/256QAM(QAM Annex A) 64/256QAM(QAM Annex B) QPSK/16/64QAM(COFDM) 8VSB(ATSC) QPSK/16/32/64QAM/QAM4_NR(DTMB)




FFT Mode	2K/4K/8K
RF output range	48 ~ 996MHz, step by 1kHz
Symbol rate	2.5 ~ 6.99MBaud
RF total output level	80 ~ 100dBuV
MER	> 36dB
Spurious rejection	> 55dB
Output return loss	-10dB

C01ASI 5 x ASI Input/Output Module	
Connector Type	5 x BNC Type Female, 75Ω
Standard	DVB-ASI, EN50083-9
Input or Output	Switch by Web Control
Input and Output Bit Rate	≤ 216Mb/s
T2-MI	Support



P01EC 4 x HDMI In Encoder/Transcoder Module	
Connector Type	4 x HDMI, type A
Coding Profile & Level	H.264/AVC BLP, MP, HP @ L4.0 or less & MPEG-2 MP@ML
Sampling Format	4:2:0
Video Resolution & Recommend Compression Bit Rate H.264	1080i1920x1080@25Hz,29.97Hz,30Hz: SMPTE274M:1-13Mb/s 1080i1440x1080@25Hz, 29.97Hz SMPTE274M: 5-24Mb/s 720p1280x720 @59.94Hz,50Hz:SMPTE296M: 1-13Mb/s 480i720x480@29.97Hz:SMPTE656M: 600K-10Mb/s 576i720x576@25Hz: SMPTE656M:600K-10Mb/s
Video Resolution & Recommend Compression Bit Rate MPEG-2	480i720x480@29.97Hz:SMPTE656M: 3M-10Mb/s 576i720x576@25Hz: SMPTE656M: 3M-10Mb/s
Vide Resolution Down Scaling	Vertical & Horizontal adjustable respectively (frame rate is not scalable)
Aspect Ratio	16:9, 4:3 selectable
Audio Input	Embedded
Coding Standard	MPEG-1 Layer II MPEG-2/4 AAC-LC, HE-AAC (V1, V2)
Sampling Rate	48kHz




Recommend Compression Bit Rate	MPEG-1 Layer II :32-192kb/s(Mono), 64-384kb/s(Stereo), MPEG-2/4 AAC-LC :24-256kb/s(Mono), 48-512kb/s(Stereo) MPEG-2/4 HE-AAC(V1/V2): 16-128kb/s(Mono), 32-256kb/s(Stereo)
Transcode Mode	H.264 to MPEG-2, H.264 to H.264, MPEG-2 to MPEG-2, MPEG-2 to H.264
Input	MPTS/SPTS, MPEG-2 MP@ML MP@HL, MPTS/SPTS, H.264/AVC Main/High/Baseline Profile @ L4.0 or less (but not FMO, ASO & RS of Baseline)
Output	MPTS and/or unstuffed TS, MPEG-2 MP@ML MPTS and/or unstuffed TS, H.264/AVC Main/High/Baseline Profile @ L4.0 or less (but not include FMO, ASO & RS of Baseline)

P02EC 4 x SDI In Encoder/Transcoder Module	
Connector Type	4xSDI, BNC Type Female, 75Ω
Coding Profile & Level	H.264/AVC BLP, MP, HP @ L4.0 or less & MPEG-2 MP@ML
Sampling Format	4:2:0, 10-bit, YCbCr
Video Resolution & Recommend Compression Bit Rate H.264	1080i1920x1080@25Hz,29.97Hz,30Hz: SMPTE274M:1-13Mb/s 1080i1440x1080@25Hz, 29.97Hz SMPTE274M: 5-24Mb/s 720p1280x720 @59.94Hz,50Hz:SMPTE296M: 1-13Mb/s 480i720x480@29.97Hz:SMPTE656M: 600k-10Mb/s 576i720x576@25Hz: SMPTE656M:600k-10Mb/s
Video Resolution & Recommend Compression Bit Rate MPEG-2	480i720x480@29.97Hz:SMPTE656M: 3M-10Mb/s 576i720x576@25Hz: SMPTE656M: 3M-10Mb/s
Vide Resolution Down Scaling	Vertical & Horizontal adjustable respectively (frame rate is not scalable)
Aspect Ratio	16:9, 4:3 selectable
Audio Input	SDI Embedded
Coding Standard	MPEG-1 Layer II MPEG-2/4 AAC-LC, HE-AAC (V1, V2)
Sampling Rate	48kHz




Recommend Compression Bit Rate	MPEG-1 Layer II :32-192kb/s(Mono), 64-384kb/s(Stereo), MPEG-2/4 AAC-LC :24-256kb/s(Mono), 48-512kb/s(Stereo) MPEG-2/4 HE-AAC(V1/V2): 16-128kb/s(Mono), 32-256kb/s(Stereo)
Second sound encoding	Support with optional extension board
Transcode Mode	H.264 to MPEG-2, H.264 to H.264, MPEG-2 to MPEG-2, MPEG-2 to H.264
Transcode Channels	4/8(Optional)
Input	MPTS/SPTS, MPEG-2 MP@ML MP@HL, MPTS/SPTS, H.264/AVC Main/High/Baseline Profile @ L4.0 or less (but not FMO, ASO & RS of Baseline)
Output	MPTS and/or un-stuffed TS, MPEG-2 MP@ML MPTS and/or un-stuffed TS, H.264/AVC Main/High/Baseline Profile @ L4.0 or less (but not include FMO, ASO & RS of Baseline)

D01PA 2 x H.264/MPEG-2 Decoder Module	
Connector Type	2 x HDMI 1.3, 1 x D-sub 15 Female 2 pairs CVBS out adapter
Video Decode	MPEG-2(MP@ ML for SD, MP@HL for HD) MPEG-4/H.264 AVC Part 10 (MP@L3 for SD, HP@L4.1 for HD)
Video Resolution	1080i×30, 1080i×29.97, 1080i×25, 720p×60, 720p×59.94, 720p×50, 576i×25, 480i×29.97
Video Bit Rate	< 50Mb/s
Aspect Ratio	16:9, 4:3 selectable
SD SDI standard	SMPT259M, 270Mb/s (10bit)
HD SDI standard	SMPT292M, 1.485Gb/s (10bit)
Sampling Rate	32kHz, 44.1kHz, 48kHz
Audio Format	MPEG Layer1/ 2 AAC-LC/AAC v1/v2
Analog Video Output	CVBS, 2 x RCA, (DB15 adapter)
CVBS Standard	NTSC, PAL, SECAM
CVBS Resolution	576i×25, 480i×29.97
Output Level	1.0 Vp-p±5% with standard test stream
Frequency Response	<±1 dB, 5.5 MHz (PAL, SECAM), 4.2MHz(NTSC)
Chroma-Luma Delay	<±30 ns
Field Time Distortion	<2%
Line Time Distortion	<1%




Short Time Distortion	<2%
Differential Gain	<3%
Differential Phase	<2°
S/N	>55dB
Analog Audio Output	4 x RCA, 2 x Group L+R, (DB15 adapter)
Output Impedance	600ΩBalanced
Output Mode	Left, Right, Mono, Stereo
Audio Decoding	2 pairs Stereo (2 groups of audios PID or 4 sound channels)
Cross Talk	>70dB
THD	<0.3% @400Hz, 1kHz test done
Frequency Response	±0.5dB 20Hz ~ 18kHz
Output Level	-30 ~ +7dBAdjustable, 0dBm/600Ω
Subtitle	DVB, EBU
VBI	Teletext, WSS
Closed Caption	EIA 608, EIA 708

D02PA 2 x H.264/MPEG-2 Decoder Module	
Connector Type	2 x SDI outputs, 1xGenlock input, BNC Female 75Ω, 2 x CVBS outputs by D-sub 15 to RCA convertor
Video Decode	MPEG-2(MP@ ML for SD, MP@HL for HD) MPEG-4/H.264 AVC Part 10 (MP@L3 for SD, HP@L4.1 for HD)
Video Resolution	1080i×30, 1080i×29.97, 1080i×25, 720p×60, 720p×59.94, 720p×50, 576i×25, 480i×29.97
Video Bit Rate	< 50Mb/s
SD SDI standard	SMPT259M, 270Mb/s (10bit)
HD SDI standard	SMPT292M, 1.485Gb/s (10bit)
Sampling Rate	32kHz, 44.1kHz, 48kHz
Audio Format	MPEG Layer1/ 2 AAC-LC/AAC v1/v2
Analog Video Output	CVBS, 2 x RCA, (DB15 adapter)
CVBS Standard	NTSC, PAL, SECAM
CVBS Resolution	576i×25, 480i×29.97
Output Level	1.0 Vp-p±5% with standard test stream
Frequency Response	<±1 dB, 5.5 MHz (PAL, SECAM), 4.2MHz(NTSC)
Chroma-Luma Delay	<±30 ns
Field Time Distortion	<2%
Line Time Distortion	<1%




Short Time Distortion	<2%
Differential Gain	<3%
Differential Phase	<2°
S/N	>55dB
Analog Audio Output	4 x RCA, 2 x Group L+R, (DB15 adapter)
Output Impedance	600ΩBalanced
Output Mode	Left, Right, Mono, Stereo
Audio Decoding	2 pairs Stereo (2 groups of audios PID or 4 sound channels)
Cross Talk	>70dB
THD	<0.3% @400Hz, 1kHz test done
Frequency Response	±0.5dB 20Hz ~ 18kHz
Output Level	-30 ~ +7dBAdjustable, 0dBm/600Ω
Subtitle	DVB, EBU
VBI	Teletext, WSS
Closed Caption	EIA 608, EIA 708
Genlock	Support
BNC Output Mode	SDI Output/ASI Input/ASI Output can be switched by Web Control

P01AT 4-Way HD/SD H.265 to H.264/MPEG-2 Transcoding Module	
Transcoding mode	H.265 HD/SD to H.264, H.265 HD/SD to MPEG-2 SD H.264 to MPEG-2 SD, H.264 to H.264, MPEG-2 to MPEG-2 SD, MPEG-2 to H.264
Input	Compliant with H.265 (HEVC), H.264/AVC Baseline, Main & High Profile @ L4.0 or less & MPEG-2 MP@ML
Coding standard	MPEG-1 Layer II MPEG-2/4, AAC-LC/HEAACsupport Dolby AC3 Passthrough
Video Resolution & Recommend Compression Bit Rate H.264	1080i1920x1080@25Hz, 29.97Hz SMPTE274M: 1-13Mb/s 1080i1440x1080@25Hz, 29.97Hz SMPTE274M: 5-24Mb/s 720p1280x720@50Hz, 59.94Hz, SMPTE296M: 1-13Mb/s 480i720x480@29.97Hz SMPTE656M: 600k-10Mb/s 576i720x576@25Hz: SMPTE656M:600k-10Mb/s



Video Resolution & Recommend Compression Bit Rate MPEG-2	480i720x480@29.97Hz SMPTE656M: 3M-10Mb/s 576i720x576@25Hz SMPTE656M: 3M-10Mb/s
Aspect Ratio	16:9, 4:3 selectable
Output	MPTS and/or un-stuffed TS, MPEG2 MP@ML MPTS and/or un-stuffed TS, H.264/AVC Main/High/Baseline Profile @ L4.0 or less (but not include FMO, ASO & RS of Baseline)

C01IP 4 x SFP TS over IP I/O Module	
Interface	4 x SFP, 1000 Base-T
Standard	IEEE 802.3, 1000 Base-T, Full Duplex
Maximum Bit Rate	920Mbps per port
Data Format	UDP/RTP, SPTS/MPTS
Control Protocol	ICMP, ARP, IGMP, v2/v3
Maximum Number of Services	4x 64 TS in; 4x 64 TS out
Operational Mode	Independent or 1+ 1 redundancy



TYPICAL APPLICATION 8 x DVB-S/S2 Demodulating + 8 x Descrambling + 5 x ASI Inputs/Outputs + 1 QAM Modulating

